



SmartPTT Plus

System Requirements

Version 8.5

July 2014





System Requirements

Architecture Description

The SmartPTT-based dispatching system can include several dispatch consoles, SmartPTT Radioservers and communication channels connecting them. Thus, technical requirements relate to three system components:

1. SmartPTT Dispatcher;
2. SmartPTT Radioserver;
3. Communication channels connecting SmartPTT Dispatcher and SmartPTT Radioserver, and communication channels connecting SmartPTT Radioserver and MOTOTRBO repeaters.

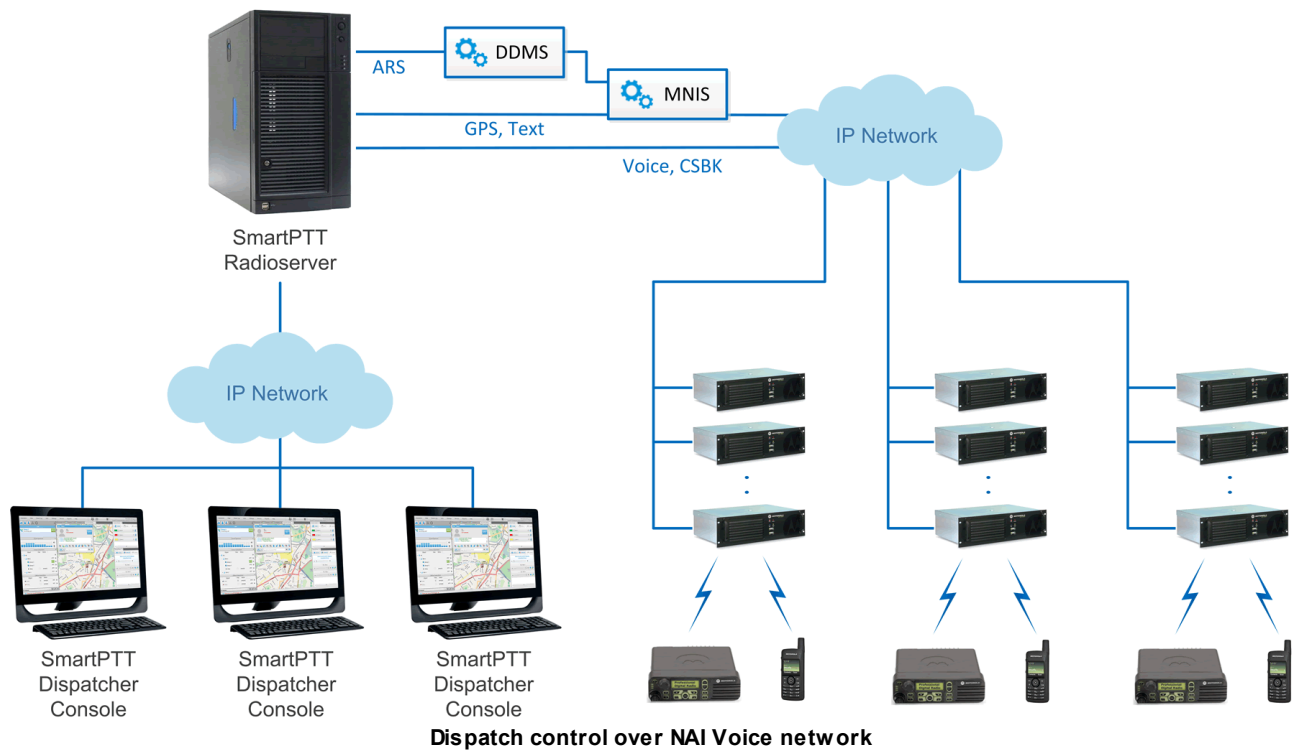

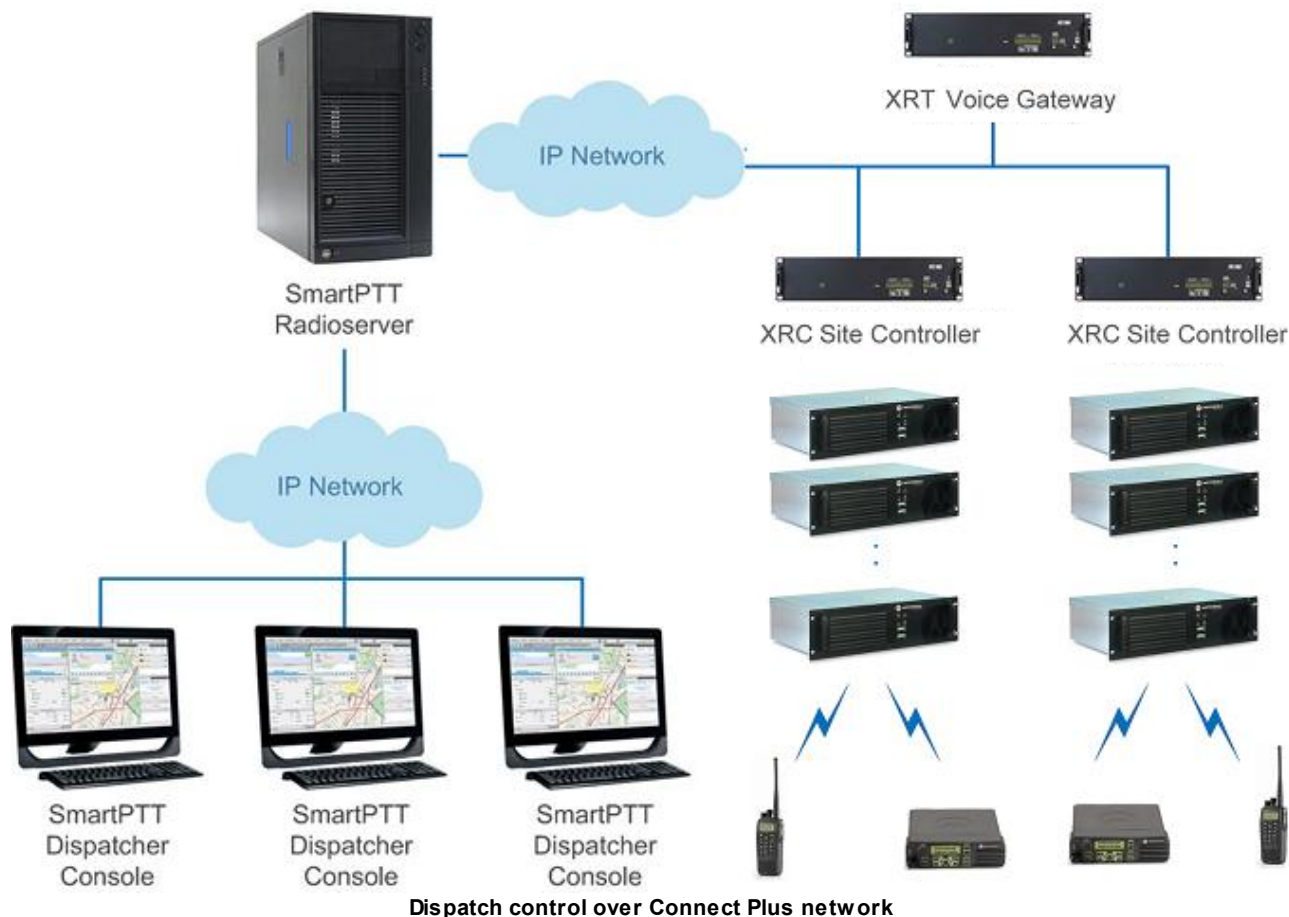

However, the number of the required components can increase. This depends on the product type and required abilities. E.g., SmartPTT Plus supports MOTOTRBO Network Application Interface protocol (NAI) for data and voice transmission over radio network, and Connect Plus. To support NAI protocol it is required to have MOTOTRBO Network Interface Service and Device Discovery and Mobility Service installed. And for Connect Plus it is obligatory to have XRC Controllers and an XRT Gateway.

1. Minimum System Requirements for SmartPTT Dispatcher

1. Intel Core i3 processor or higher
2. Windows 7, Windows 8 operating systems
3. RAM 2 GB or more
4. Hard drive

The hard drive size depends on the size of the database and recorded calls. There must be at least 12 GB of the hard drive space available if you install Microsoft SQL Server 2008 R2 Express. Using a database server other than SQL Express, free space depends on the planned volume of data. By default, calls are recorded with a bitrate of 40 Kbps. A minute of a resulting audio takes approximately 300 Kb of your hard disk space.

5. Network adapter
6. Monitor with 1024x768 resolution or higher
7. Keyboard
8. Mouse or other pointing device
9. Sound card
10. Audio recording and playback devices (e.g., microphone and speakers)

It is required to use high-quality sound card and audio recording devices, as it affects a sound quality of the whole system.

2. Minimum System Requirements for SmartPTT Radioserver

1. Intel Core i3 processor or higher
2. Windows 7, Windows 8, Windows Server 2008 operating systems
3. RAM 2 GB or more
4. Hard drive

The hard drive size depends on the size of the database and recorded calls. There must be at least 12 GB of the hard drive space available if you install Microsoft SQL Server 2008 R2 Express. Using a database server other than SQL Express, free space depends on the planned volume of data. By default, calls are recorded with a bitrate of 40 Kbps. A minute of a resulting audio takes approximately 300 Kb of your hard disk space.

5. Network adapter
6. Sound card

When control stations are used in SmartPTT system, SmartPTT Radioserver must be equipped with a multi-channel sound card. The sound card has an impact on the sound quality of the whole SmartPTT system. We recommend you to use high-quality sound cards, such as M-AUDIO – Delta 1010LT, MAYA44XTe, ICON Digital Cube Pro USB. If you need more than 4 audio channels, please send your

query to the [SmartPTT technical support service](#) for assistance.

Note: These are general system requirements for SmartPTT Dispatcher and SmartPTT Radioserver. They can change due to configuration and complexity of the radio system and its workload.

3. Requirements for Communication Channels

Between SmartPTT Radioserver and SmartPTT Dispatcher the required bandwidth is equal to the bandwidth required for voice transmission.

In case of IP connection to MOTOTRBO infrastructure (via NAI Voice or XRT Gateway) each channel or talkpath between client and server requires 25 kbit/s. In case of a Control Station configuration the CCITT uLaw codec is used by default and the required bandwidth is 90 kbit/s per one channel. When you use codecs with a higher compression ratio, the bandwidth requirements are significantly reduced and the sound quality decreases.

To calculate the total required maximum channel bandwidth for SmartPTT Dispatcher, multiply required bandwidth for each channel by the channel quantity. It is recommended to have a maximum delay and jitter of 60 ms in IP network between server and client. The higher delay or jitter can affect sound quality and dispatcher experience.

To calculate the required channel bandwidth, delay and jitter between SmartPTT Radioserver and MOTOTRBO infrastructure in case of IP connection via NAI Voice or XRT Gateway, SmartPTT Radioserver should be considered as a virtual site in the system. Refer to the MOTOTRBO SYSTEM PLANNER for more specific details.

Note: If SmartPTT Radioserver uses a single network interface to communicate both with MOTOTRBO systems and SmartPTT Dispatcher, total channel bandwidth required by SmartPTT Radioserver is a sum of bandwidths required for all MOTOTRBO systems and dispatch consoles, connected to the radioserver.

System Requirements for MOTOTRBO Hardware

Regions	Mobile Radio	Firmware Version	Portable Radio	Firmware Version	Repeater	Firmware Version
APAC	XiR M82xx series XiR M86xx series	R01.12.11 or higher R02.30.10 or higher	XiR P82xx series, XiR E8608/8600 XiR P8668/8660, XiR P8628/8620, XiR P8608/8600, SL1K	R01.12.11 or higher R02.30.10 or higher	XiR R8200	R02.30.12 or higher

EA	DM 1000, 2000 series DM 3000 series DM 4000 series	R01.00.10 or higher R01.12.11 or higher R02.30.10 or higher	DP 3000 series DP 4000 and SL series	R01.12.11 or higher R02.30.10 or higher	DR3000, MTR3000	R02.30.12 or higher
LACR	DGM 6100+/6100, DGM 4100+/4100 DGM 8000 series	R01.12.11 or higher R02.30.10 or higher	DGP 6150+/6150, DGP 4150+/4150, DGP 8050 ELITE DGP 8550/5550, DGP 8050/5050	R01.12.11 or higher R02.30.10 or higher	DGR 6175, MTR 3000	R02.30.12 or higher

For Connect Plus network, the XRC Controllers and XRT Gateway must have firmware versions 1.4 or higher.

Warning! MOTOTRBO repeaters in one network must have same firmware versions.

Warning! The firmware versions of the repeaters and MOTOTRBO Network Interface Service must be compatible (you can find compatibility information in MNIS Release Notes).

Note: Only repeaters with 32 MB of internal memory support NAI protocol. **Network Application Interface Data** license is required for all data functionality. For voice transmission both licenses (**Application Interface Data** and **Network Application Interface Voice**) are required.

Note: It is recommended to use a control station with display to be able to receive emergency calls.

List of Ports Used by SmartPTT

SmartPTT Dispatcher (Source)

Transport Protocol	Source	Destination	Comments
TCP	X	8888	Server (Commands)
UDP	18501	18500	Server (Voice)
UDP	18501	18501	Intercom (Communication between Dispatchers), Data,
TCP	18501	18501	Commands

Transport Protocol	Source	Destination	Comments
			Intercom (Communication between Dispatchers), Voice
UDP/TCP	5060	5060	Telephone Interconnect (Commands)
UDP	18700-18748	X	Telephone Interconnect (Voice)

SmartPTT Radioserver (Source)

Transport Protocol	Source	Destination	Comments
TCP	8888	X	Client (Commands)
UDP	18500	18501	Client (Voice)
TCP	X	110, 25, 587 (with SSL), 995 (with POP3), 993 (IMAP4)	E-mail gateway
UDP	161 162	161	SNMP (Monitoring)
UDP/TCP	5060	5060	Telephone Interconnect (Commands)
UDP	18650-18660	X	Telephone Interconnect (Voice)
TCP	X	8002	Connection to control station
UDP	4001 4005 4007 4008	4001 4005 4007 4008	For control station configuration only (4001 – Location, 4005 – Registration Service, 4007 – Messaging Service, 4008 – Telemetry Service)
UDP	50000	50000	For repeater configuration only
UDP	19000-(19000 + Talk Path number) 5005 5007 5001	X 4005 4007 4001	For Connect Plus network configuration only (19000 – used by SmartPTT Radioserver for talk paths, 5001/4001 – Location Service, 5005/4005 – Registration Service, 5007/4007 – Messaging Service)

5060 – Port is set by default and can be changed

4001 – Port can't be changed